




TOP VIEW

SIDE VIEW

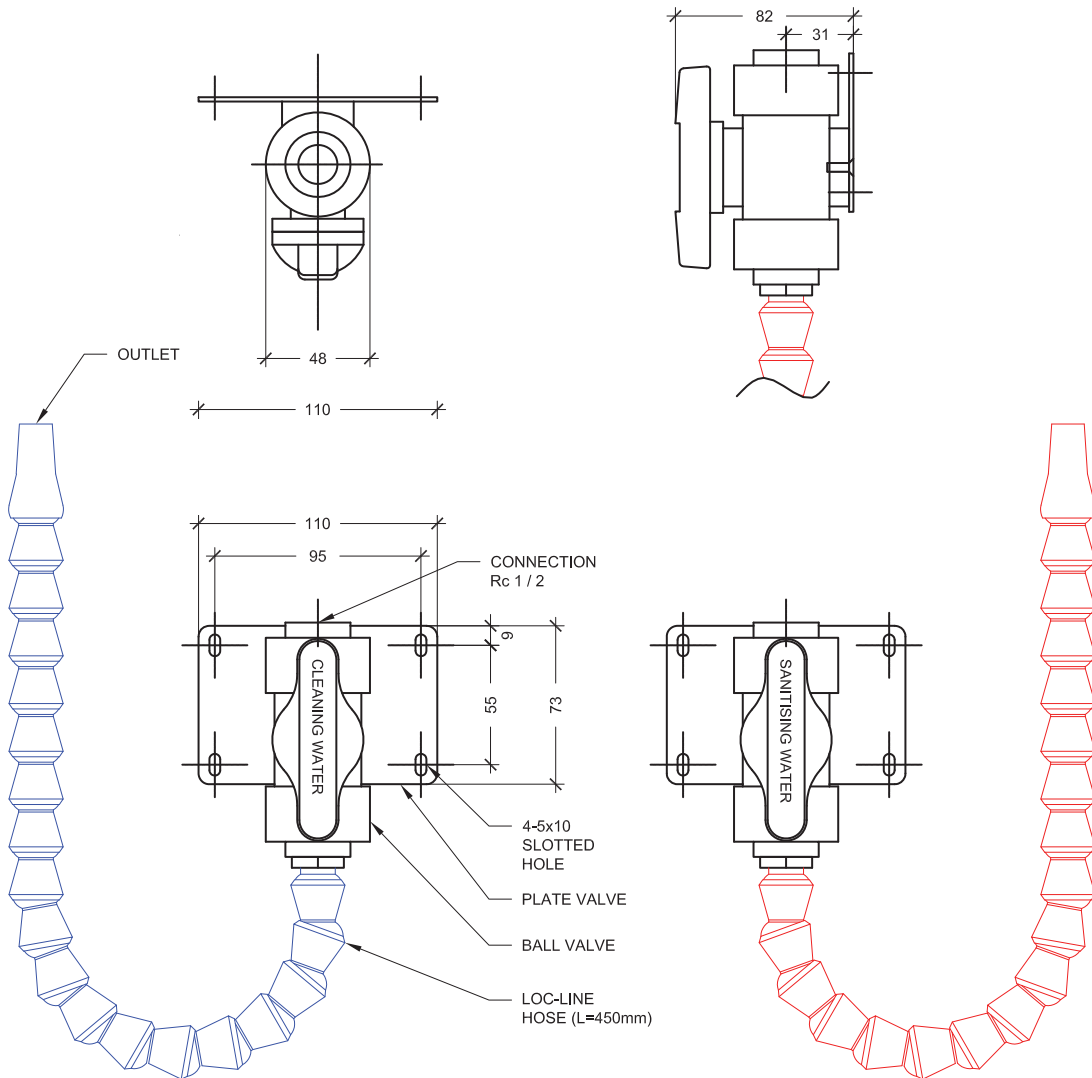

FRONT VIEW

AY SINK TAP OUTLET							
REF	DESCRIPTION	PLANT DETAILS			CONNECTION DETAILS		COMMENTS
		NO.	MANUFACTURER	MODEL	CLEANING WATER INLET(mm)	SANITIZING WATER INLET (mm)	
eWS-AYO-1 TO 9	eWATER SYSTEMS AY SINK TAP OUTLET	9	HOSHIZAKI	AY	1 x 12mm	1 x 12mm	<ul style="list-style-type: none"> - AY TAP SETS FLOW RATE 9-12 LITRES PER MINUTE - AY VALVES INSTALLED AT AN APPROPRIATE HEIGHT WHERE THE FLEXIBLE CONNECTIONS CAN EASILY DISCHARGE DIRECTLY INTO THE SINK AND ARE EASILY ACCESSIBLE. - AY TAP SETS INSTALLED OVER A DOUBLE BOWL HAVE eWATER CLEANING WATER VALVE CENTRE LEFT HAND SIDE BOWL AND eWATER SANITISING WATER CENTRE RIGHT HAND SIDE BOWL. - HINGED TYPE ACCESS PANELS, NOT SCREW TYPE, OF SUFFICIENT DEPTH TO FIT ISOLATION VALVES. ACCESS PANELS TO BE INSTALLED BY OTHERS.